

★ Technician Specifications


Model No.	JSD-H1D060-S
CAMERA	
Image Sensor	1/3" Aptina Progressive CMOS sensor
CPU	Hi3518A
Effective Pixels	1280(H) x960(V)
Scanning System	Progressive
Electronic Shutter Speed	Auto (1/25,1/30 ~ 1/10000s)
Min. Illumination	0.05Lux/F1.2 (Color), 0.005Lux/F1.2(B/W); 0Lux/F1.2 (IR on)
S/N Ratio	>50dB
CAMERA FEATURES	
Backlight Compensation	BLC / HLC / DWDR
White Balance	Auto/Manual
Gain Control	Auto/Manual
Noise Reduction	3D
Privacy Masking	Up to 4 Areas
LENS	
Focal Length	3MP 2.8/3.6mm fixed lens
Max Aperture	F1.4
Focus Control	Manual
Lens Type	Fixed Iris
Mount Type	Board-in Type
VIDEO	
Compression	H.264 Main Profile, Baseline / MJPEG
Resolution	1.3MP(1280x960)/720P(1280x720)
Frame Rate	Main Stream: 1280x960(1~25/30fps), 1280x720 (1~25/30fps) Sub Stream: 704x576, 320x240, 160x112 (1~25/30fps)
Bit Rate	32KB ~16Mbps, support VBR, CBR
Audio	
Compression	G.711A / G.711U/ G.726
Interface	3.5mm audio interface, 1 channel Input, 1 channel Output
NETWORK	
Interface	RJ-45 (10/100Base-T)
WIFI	NA
Protocol	IPv4, HTTP, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP,
Compatibility	ONVIF 2.4
Smart Phone	iPhone, iPad, Android, Windows phone
GENERAL	
Power Supply	DC12V
Power Consumption	≤5W
Working Environment	-10 °C ~ 60 °C
Vandalproof	Vandalproof
Dimension	Φ120mm x62mm
Weight	0.5kg



★ Main Features

- 1/3" Aptina Progressive CMOS sensor
- 1280x960 HD full real-time recording, 30fps(N)/25fps(P)
- 3D DNR & DWDR & BLC
- Support iPad/ iPhone/ Android mobile phone monitoring
- 3MP 2.8/3.6mm fixed lens

★ Interface Cable

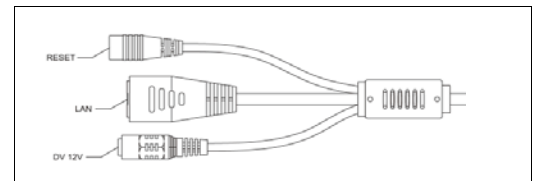

★ Available functions

- 2MP 1080P JSD-H2D060-S available